

Are these misconceptions putting your organization at risk?

10 Cyber Security Myths You Need To Stop Believing

It's Time To Stop Believing These
10 Cybersecurity Myths







Hacker Combat LLC

MORE ON THE

OTHER SIDE

Cybersecurity myths are a real threat because they tend to prompt users to ignore real threats, helping bad actors get your data, or simply to wreak havoc. Knowing that myths are merely illusions is the first step toward a safer life online.



Your business is too small for a cyber attack








Anti-virus/Anti-malware is good enough



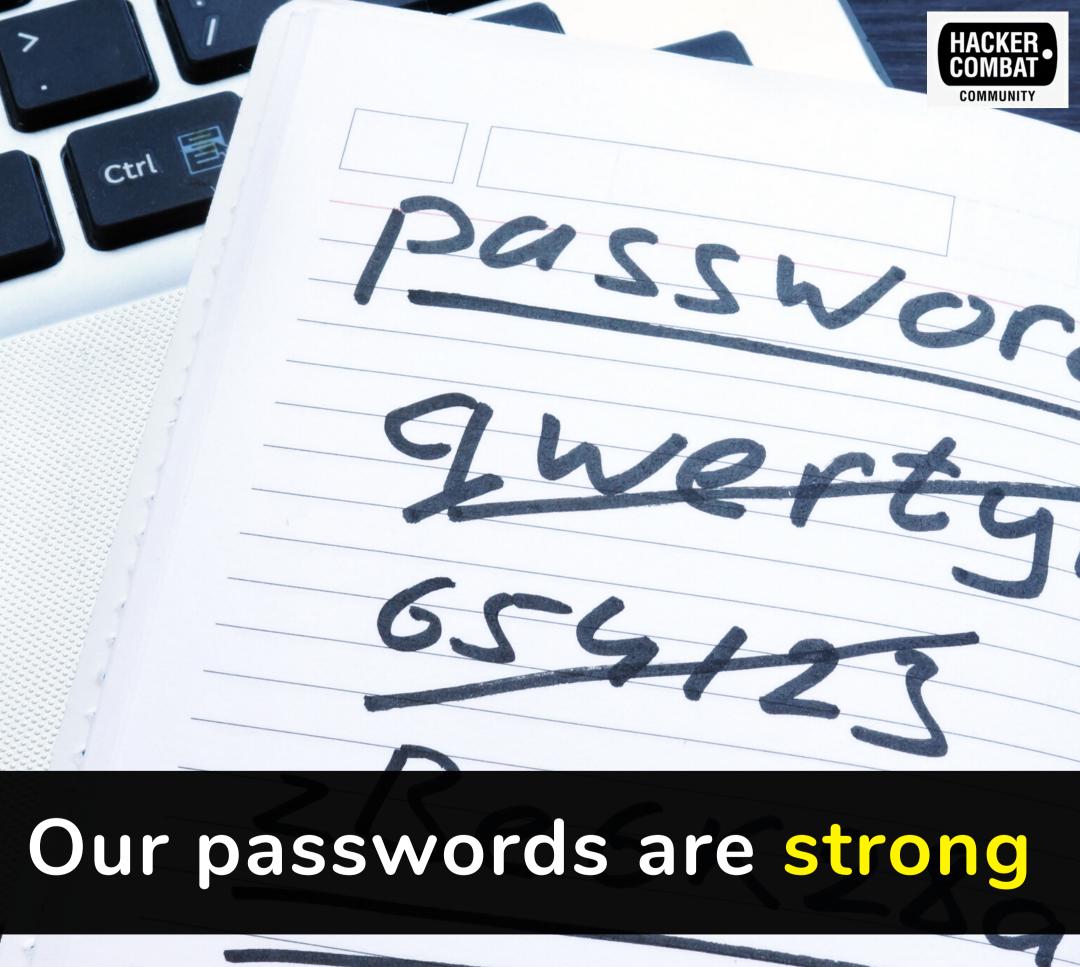










Bringing your own device is safe





Our cyber security system is Perfect



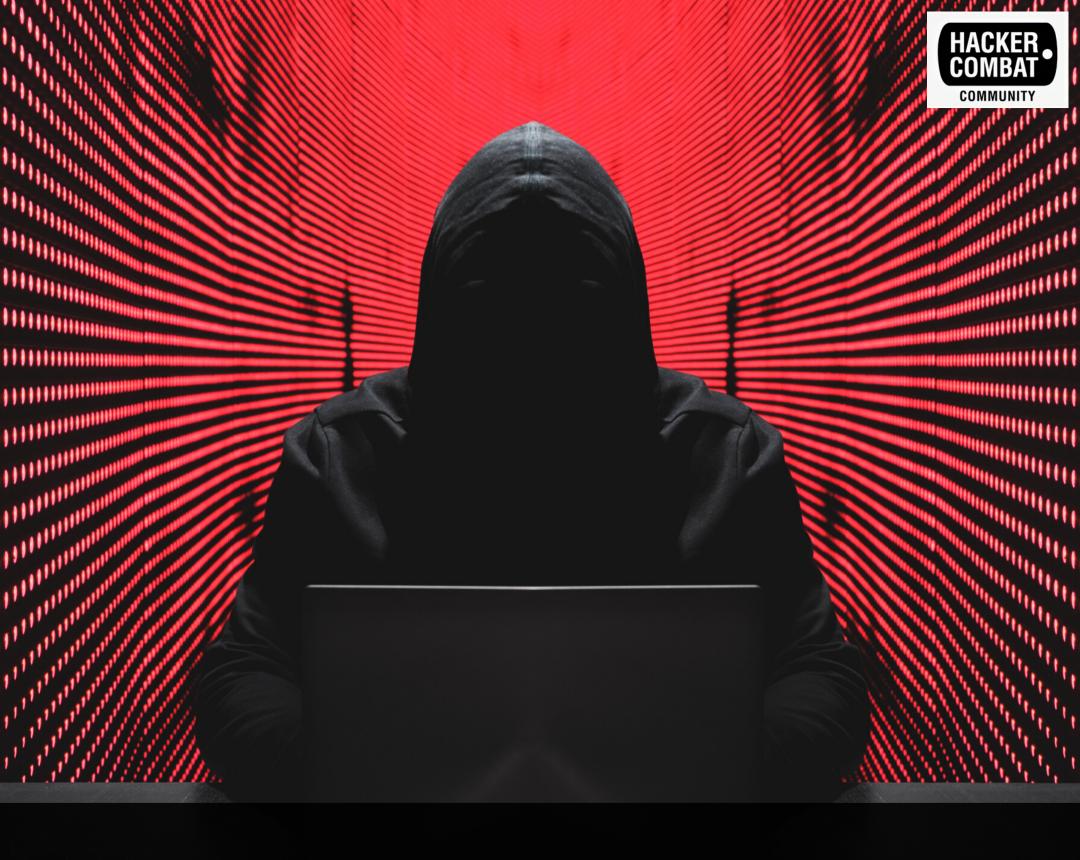

Threats are only external





IT department will take care of it





We don't need tests or training

00000001 0

00101001 00

0100111 0011

00110001 00010101 00

00010101 01001100 00

00101010 00010110 001

00000 00001000

00101101 000001

00100000 00001



```
mire:ovar:/q.s status.command if ("true") addstrings and
                                                                                      HACKER_
  (logged: # input.new(c
              // script src= address [statu
                                                                                       COMMUNITY
     command >>> access:denial // scri
    then script src-[true] {?unkno
    (Punknown) m#4:80a?:
        script src=[true]local.config
         echain» = (d fg#6 mn4:h61le
        arc= address [status?] code<
         sidenial // script src=[error]
    [ Tunknown ] m#4:80a?:/
                                      status. omm
                                                      ue') addst
       script src=[true] local.confi
                                    (245, 23, 068, 789,
                                                     K.command]#xxa
               igind a input false fun
                                    n name < imq>=spa
function leain credentials (logged:
                                   put.new(create)}
             // script src= address
                                                     tus (m#48
                                    atus?] code < [tr
                                                       de logged (t
                                     t src=[erro
                                                  ici
wask.command #>>access:denial //
                                                 statu
    then script src=[true]{?unk
                                               onfig sc
                                               anfiq sc
           A faise function logged:#
                                               onf sc
         tru
   (Punknown) m#4:80a?:/q.s statu
       crist src-[true] local.config = (245, 23, 6 8
            min>= (d fg#6 mn4:h61l04y) name<i g> s an a dr s og
       code ([true] # status (m#4:80a?:/q.s) (bgg
              | // script src=[error] malicious code logged (trigger.warning)
              m#4:80a?:/q.s status.command if ("true") addstring
                        config = (245, 23, 068, 789, a48) [lock.command] = 245, 23, 068, 789, a48)
                                        -- 24 #) if = frame cings = span/ (245,28,00)
```

We will see the malware right away



Always be cautious.

Doesn't matter if you have

10 employees or 10,000,

your business is at risk of
getting hit by a cyber attack.



Follow us









Visit
Hackercombat.com



LIKE COMMENT SHARE

HACKERCOMBAT.COM

FOLLOW HACKER COMBAT LINKEDIN PAGE